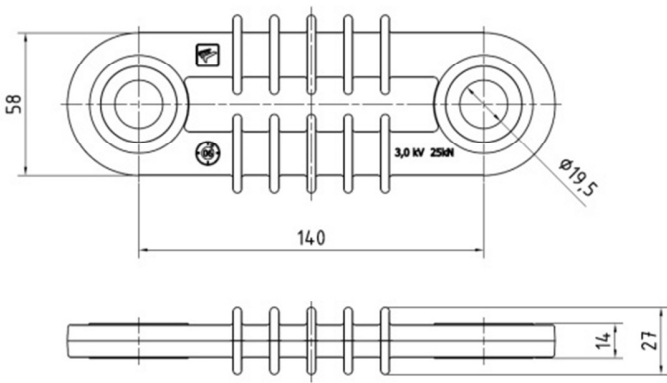
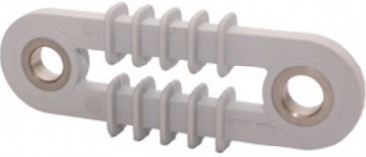



PRZYKŁADOWE KARTY KATALOGOWE

221010	Silicone loop insulator, without thimble 25kN Izolátor smyčkový silikonový, bez očnic 25kN	Weight: 0.25 kg / pcs.
		
		
		
USED MATERIALS		
part	material	
Body	glass fibre reinforced plastic	
Socket	stainless steel	
Sheath	silicone rubber	
OTHER INFORMATION		
label	value	description
Service voltage Un	3 kV DC	according to EN 50163
Permitted load	25 kN	
Absorbability test	OK/OK	

223111

Single holder for contact wire in curve with bolt 16
Závěs troleje do oblouku jednoduchý s čepem 16 (Bz)

Weight:
1.64 kg / pcs.










USED MATERIALS

part	material
Hinge	CuZn16Si4
Insulator	cyclo-epoxies
Bolt, connecting parts	stainless steel

OTHER INFORMATION

label	value	description
Service voltage	1,5 kV= and 1,0 kV~	
Permitted load	3 kN	
Breaking load	9 kN	

Rurowy słup trakcyjny do fundamentu KR/R
Tubular traction post installed in foundation KR/R

		Oznaczenie Marking							
			kN	m	m	m	mm	mm	mm
KR/R		KR/R-8/7,5/1,3...2,5	8	7	7,5 (8,0)	1,3...2,5 w zależności od kierunku fundamentu	288,5	218,1	159,0
		KR/R-12/7,5/1,3...2,5	12				323,9	244,5	
		KR/R-15/7,5/1,3...2,5	15						
		KR/R-20/7,5/1,3...2,5	20				406,4	298,5	
		KR/R-25/7,5/1,3...2,5	25						
STR-1 STR-2 (grupa 1000) STR-3 (grupa 1000) STR-4 STR-3/12 STR-4/12 TR-8/10 TR-8/15 TR-8/25		KR/R-8/7,1/1,3...2,5	8	7	7,1 (8,0)	1,3...2,5 w zależności od kierunku fundamentu	273,1	218,1	168,3
		KR/R-12/7,1/1,3...2,5	12				323,9	273,1	
		KR/R-20/7,1/1,3...2,5	20						
		KR/R-25/7,1/1,3...2,5	25						
		KR/R-15/7,5/1,3...2,5	15						
		KR/R-25/7,5/1,3...2,5	25						
		KR/R-10/8,0/1,3...2,5	10				353,6	273,0	
		KR/R-15/8,0/1,3...2,5	15						
		KR/R-25/8,0/1,3...2,5	25						

